


CELL Type	Ah @C5 at 30°C	Length (mm)	Dry weight (Kg.)	Acid Volume (Ltr.)	Filled Weight (Kg.)
<b>XWAF Range: Positive Plate Capacity 60 Ah, Overall Height 378 mm, Height upto Lid Top 348 mm</b>					
XWAF5	120	47	6.5	1.5	8.4
XWAF7	180	65	9.3	2.3	12.3
XWAF9	240	83	12.1	3.0	16.0
XWAF11	300	101	14.9	3.7	19.7
XWAF13	360	119	17.7	4.5	23.5
XWAF15	420	137	20.5	5.2	27.2
XWAF17	480	155	23.4	5.9	31.1
XWAF19	540	173	26.2	6.7	34.9
XWAF21	600	191	29.0	7.4	38.5
<b>XWCF Range: Positive Plate Capacity 90 Ah, Overall Height 494 mm, Height upto Lid Top 464 mm</b>					
XWCF5	180	47	9.1	2.0	11.7
XWCF7	270	65	13.1	3.1	17.1
XWCF9	360	83	16.9	4.1	22.2
XWCF11	450	101	20.8	5.1	27.4
XWCF13	540	119	24.7	6.2	32.7
XWCF15	630	137	28.7	7.1	37.8
XWCF17	720	155	32.7	8.1	43.2
XWCF19	810	173	36.6	9.2	48.5
XWCF21	900	191	40.5	10.1	53.6
<b>XWFEF Range: Positive Plate Capacity 110 Ah, Overall Height 611mm, Height upto Lid Top 581mm</b>					
XWFEF5	220	47	12.2	2.5	15.5
XWFEF7	330	65	17.4	4.0	22.5
XWFEF9	440	83	22.5	5.3	29.4
XWFEF11	550	101	27.6	6.5	36.1
XWFEF13	660	119	32.8	7.9	43.0
XWFEF15	770	137	37.9	9.2	49.8
XWFEF17	880	155	43.4	10.5	56.9
XWFEF19	990	173	48.5	11.9	63.8
XWFEF21	1100	191	53.7	13.1	70.5
<b>XWFFF Range: Positive Plate Capacity 140 Ah, Overall Height 753mm, Height upto Lid Top 723mm</b>					
XWFFF5	280	47	14.8	3.2	19.0
XWFFF7	420	65	21.2	5.0	27.6
XWFFF9	560	83	27.4	6.6	36.0
XWFFF11	700	101	33.7	8.2	44.2
XWFFF13	840	119	40.0	9.9	52.8
XWFFF15	980	137	46.3	11.5	61.0
XWFFF17	1120	155	52.8	13.1	69.7
XWFFF19	1260	173	59.1	14.8	78.2
XWFFF21	1400	191	65.4	16.3	86.5

CELL Type	Ah @C5 at 30°C	Length (mm)	Dry weight (Kg.)	Acid Volume (Ltr.)	Filled Weight (Kg.)
<b>XWBF Range: Positive Plate Capacity 80 Ah, Overall Height 445 mm, Height upto Lid Top 415 mm</b>					
XWBF5	160	47	8.3	1.7	10.6
XWBF7	240	65	11.8	2.7	15.4
XWBF9	320	83	15.3	3.6	20.0
XWBF11	400	101	18.8	4.5	24.6
XWBF13	480	119	22.3	5.4	29.3
XWBF15	560	137	25.8	6.3	33.9
XWBF17	640	155	29.4	7.2	38.7
XWBF19	720	173	32.9	8.1	43.4
XWBF21	800	191	36.4	9.0	48.0
<b>LXWFEF Range: Positive Plate Capacity 110 Ah, Overall Height 582mm, Height upto Lid Top 552mm</b>					
LXWFEF5	220	47	11.9	2.3	14.9
LXWFEF7	330	65	17.1	3.7	21.8
LXWFEF9	440	83	22.2	4.9	28.5
LXWFEF11	550	101	27.3	6.0	35.1
LXWFEF13	660	119	32.4	7.3	41.9
LXWFEF15	770	137	37.6	8.5	48.5
LXWFEF17	880	155	42.8	9.7	55.3
LXWFEF19	990	173	48.0	11.0	62.1
LXWFEF21	1100	191	53.1	12.1	68.7
<b>LXWFFF Range: Positive Plate Capacity 140 Ah, Overall Height 729mm, Height upto Lid Top 699mm</b>					
LXWFFF5	280	47	14.7	3.0	18.7
LXWFFF7	420	65	21.0	4.8	27.2
LXWFFF9	560	83	27.3	6.4	35.5
LXWFFF11	700	101	33.5	7.8	43.6
LXWFFF13	840	119	39.7	9.5	52.0
LXWFFF15	980	137	46.0	11.0	60.1
LXWFFF17	1120	155	52.5	12.6	68.7
LXWFFF19	1260	173	58.7	14.2	77.1
LXWFFF21	1400	191	65.0	15.7	85.2

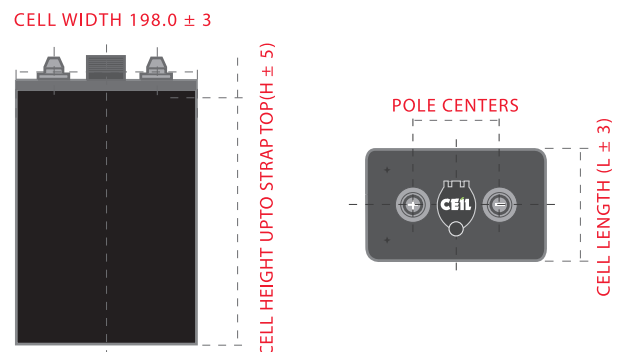

Cell weights are subject to a tolerance of ±5%. Cell dimensions are subject to a tolerance of; ±3mm for length and width and; ±5mm height.

D denotes double pillar.

Formula for 6 hr capacity = 103% C5 and 8 hr capacity = 108% C5.

Technical specifications provided are subject to change without notice.

### Chloride Batteries S.E. Asia Pte Ltd

106 Neythal Road | Jurong Town | Singapore 628594

T (65) 6265 2444 | F (65) 6265 1478

E salesdesk@cbsea.com.sg


W www.cbsea.com.sg / www.ceilbatterysystems.com

**ENABLING RELIABILITY**

CELL Type	Ah @C5 at 30°C	Length (mm)	Dry weight (Kg.)	Acid Volume (Ltr.)	Filled Weight (Kg.)
<b>XXVF Range: Positive Plate Capacity 29 Ah, Overall Height 297 mm, Height upto Lid Top 267 mm</b>					
XXVF7	86	61	5.4	1.0	6.6
XXVF9	114	77	6.8	1.2	8.5
XXVF11	143	93	8.2	1.5	10.0
XXVF13	171	109	9.6	1.8	12.0
XXVF15	200	125	11.0	2.1	13.8
XXVF17	228	141	12.4	2.4	15.5
XXVF19	257	157	13.8	2.7	17.5
XXVF21	285	173	15.2	3.0	19.0
XXVF23	314	189	16.6	3.3	21.0
XXVF25	342	205	18.0	3.6	22.7
<b>XILF Range: Positive Plate Capacity 54 Ah, Overall Height 437 mm, Height upto Lid Top 407 mm</b>					
XILF5	108	47	5.8	1.5	7.7
XILF7	162	61	8.2	2.1	10.8
XILF9	216	77	10.5	2.7	14.0
XILF11	270	93	13.6	3.1	17.6
XILF13	324	109	15.9	3.8	20.8
XILF15	378	125	18.3	4.3	23.9
XILF17	432	141	20.7	5.0	27.1
XILF19	486	157	23.6	5.5	30.7
XILF21	540	173	26.0	6.2	33.9
XILF23	594	189	28.4	6.7	37.1
XILF25	648	205	30.8	7.3	40.2
XILF27	702	221	33.2	7.9	43.3
<b>XTHF Range: Positive Plate Capacity 73 Ah, Overall Height 544 mm, Height upto Lid Top 514 mm</b>					
XTHF5	146	47	7.5	1.9	10.0
XTHF7	219	61	11.6	2.5	14.9
XTHF9	292	77	14.8	3.3	19.1
XTHF11	365	93	18.0	4.0	23.2
XTHF13	438	109	21.2	4.8	27.4
XTHF15	511	125	24.4	5.6	31.5
XTHF17	584	141	28.1	6.4	36.4
XTHF19	657	157	31.3	7.1	40.5
XTHF21	730	173	34.4	7.9	44.6
XTHF23	803	189	37.7	8.7	49.0
XTHF25	876	205	40.9	9.4	53.1
XTHF27	949	221	44.1	10.2	57.2
<b>XRTB Range: Positive Plate Capacity 73 Ah, Overall Height 553 mm, Height upto Lid Top 523 mm</b>					
XRTB9	290	72	15.8	3.0	18.8
XRTB11	360	90	16.9	3.8	21.5
<b>XTOF Range: Positive Plate Capacity 86 Ah, Overall Height 612 mm, Height upto Lid Top 582 mm</b>					
XTOF9	344	77	15.7	3.9	20.7
XTOF11	430	93	19.4	4.6	25.3
XTOF13	516	109	23.0	5.5	30.2
XTOF15	602	125	26.7	6.4	35.0
XTOF17	688	141	31.0	7.4	40.5
XTOF19	774	157	34.7	8.2	45.2
XTOF21	860	173	38.3	9.0	50.0
XTOF23	946	189	42.1	9.9	54.9

CELL Type	Ah @C5 at 30°C	Length (mm)	Dry weight (Kg.)	Acid Volume (Ltr.)	Filled Weight (Kg.)
<b>XIMF Range: Positive Plate Capacity 40 Ah, Overall Height 369 mm, Height upto Lid Top 339 mm</b>					
XIMF7	120	61	6.9	1.7	9.0
XIMF9	160	77	8.9	2.2	11.7
XIMF11	200	93	10.8	2.6	14.2
XIMF13	240	109	12.8	3.2	16.9
XIMF15	280	125	14.8	3.6	19.5
XIMF17	320	141	16.8	4.2	22.2
XIMF19	360	157	19.3	4.6	25.3
XIMF21	400	173	21.4	5.1	28.0
XIMF23	440	189	23.4	5.6	30.6
XIMF25	480	205	25.4	6.1	33.2
<b>XTLF Range: Positive Plate Capacity 63 Ah, Overall Height 488 mm, Height upto Lid Top 458 mm</b>					
XTLF5	126	47	6.5	1.7	8.7
XTLF7	189	61	10.0	2.2	12.9
XTLF9	252	77	12.8	3.0	16.6
XTLF11	315	93	15.5	3.6	20.1
XTLF13	378	109	18.2	4.3	23.7
XTLF15	441	125	20.9	4.9	27.2
XTLF17	504	141	24.2	5.7	31.5
XTLF19	567	157	26.9	6.3	35.0
XTLF21	630	173	29.6	7.0	38.6
XTLF23	693	189	32.4	7.7	42.3
XTLF25	756	205	35.1	8.3	45.8
XTLF27	819	221	37.8	9.0	49.4
<b>XTEF Range: Positive Plate Capacity 99 Ah, Overall Height 723 mm, Height upto Lid Top 693 mm</b>					
XTEF5	198	47	10.0	2.6	13.3
XTEF7	297	61	14.4	3.6	19.0
XTEF9	396	77	18.7	4.7	24.8
XTEF11	495	93	23.1	5.7	30.4
XTEF13	594	109	27.4	6.8	36.2
XTEF15	693	125	31.8	7.8	41.8
XTEF17	792	141	36.8	8.9	48.4
XTEF19	891	157	41.2	9.9	54.0
XTEF21	990	173	45.5	11.0	59.6
XTEF23	1089	189	50.0	12.0	65.5
XTEF25	1188	205	54.3	13.1	71.2
XTEF27	1287	221	58.7	14.1	76.8

XTEF Range is also available with lower height models

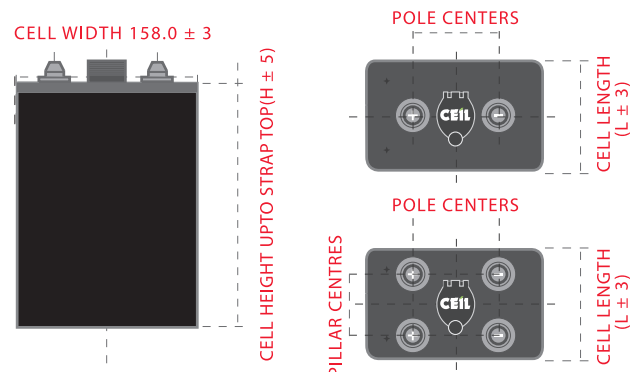

**ENABLING RELIABILITY**